

# **A hydro-geochemical model for variably saturated flow with multi-component gas diffusion: application to predict pollutant fate and transport in Technosols**

Hossein Davarzani, Samuel Coussy, Geoffrey Boissard, Philippe Blanc,  
Philippe Bataillard

## ► **To cite this version:**

Hossein Davarzani, Samuel Coussy, Geoffrey Boissard, Philippe Blanc, Philippe Bataillard. A hydro-geochemical model for variably saturated flow with multi-component gas diffusion: application to predict pollutant fate and transport in Technosols. The XXI International Conference Computational Methods in Water Resources (CMWR) , Jun 2016, Toronto, Canada. <hal-01289091>

**HAL Id: hal-01289091**

**<https://hal-brgm.archives-ouvertes.fr/hal-01289091>**

Submitted on 16 Mar 2016

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# A hydro-geochemical model for variably saturated flow with multi-component gas diffusion: application to predict pollutant fate and transport in Technosols

H. Davarzani (h.davarzani@brgm.fr), S. Coussy, G. Boissard, P. Blanc, P. Bataillard  
French geological survey (BRGM), Orléans, FRANCE

**Key words:** hydro-geochemical modeling, Technosol, pollutants

## Introduction

The prediction of the long term trace element transport in Technosols, defined as soils containing at least 20 % of human-made materials within the 100 cm upper soil horizon, would be a way to anticipate land management. These soils, usually abandoned for decades, contain pollutants resulting from industrial processes. The main objective of this study is to develop a model to predict the hydro-geochemical and mechanical evolutions in Technosols.

In this study, the model developments have been made in order to consider the multi-component soil gas phase diffusion whereas the original COMSOL-Phreeqc coupling model [1] does not take it into account. Therefore, the coupling model is able to (i) take into account soil hydro-geochemical heterogeneity (such as permeability and porosity contrasts), (ii) manage multi-component gas diffusion, consumption and generation in unsaturated soil and (iii) take climatic variations, such as rain infiltration, into consideration.

## Model concept and validation


The COMSOL<sup>®</sup> and IPhreeqc procedures alternate for the calculation of liquid water flow, gas and solute transport and reactions using a non-iterative sequential split-operator approach. Data from the output of one procedure is passed back to the Matlab<sup>®</sup> workspace and reformatted for the following procedure. The gas phase mole numbers and volume are updated using IPhreeqc's method `GAS_PHASE_MODIFY`. As for flow and transport calculations, a function is used to create valid initial conditions for gas transport calculations in COMSOL. The coupling developed model has been validated using CrunchFlow [2] in a 1-D and fixed soil water saturation case.

## Model application and results

The coupling model was applied on a case study consisting in a Technosol developed on dredged sediments. The mineralogical compositions of two

samples, from fractured oxidation crust and soil block center, were characterized by X-Ray Diffraction spectroscopy. The mineralogical assemblage of the block center sample is used as the composition of the initial sediment deposited 30 years ago. The model axisymmetric geometry consists of a heterogeneous soil profile with a fracture region (about 0.5 m large, 1 m depth). The atmospheric oxygen and carbon dioxide diffuse permanently into the soil and fracture over the time at their respective diffusion coefficients.

The modeling results over 30 years have shown that the Technosol weathering leads to dissolution of galena with consumption of the soil oxygen, as well as precipitation of lead carbonates and formation of ferrihydrite. These mineralogical transformations take place more in poorly saturated zones in the profile such as cracks and soil surface. An example of the results is shown in *Figure 1* for gaseous oxygen diffusion into the soil and related kinetic of galena dissolution after 30 years. The model can capture well the soil evolution trend at least for about 30 years.

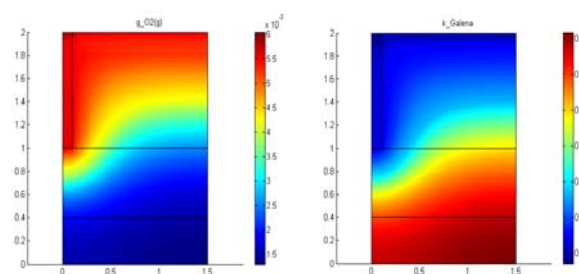

*Figure 1:* Oxygen concentration in soil air (mol/L) and galena concentration (mol/kgw) after 30 years.

## References

- [1] L. Wissmeier and D.A. Barry. Simulation tool for variably saturated flow with comprehensive geochemical reactions in two- and three-dimensional domains, *Environmental Modelling & Software*, **26**, 210-218 (2011).
- [2] C.I. Steefel and S.B. Yabusaki. OS3D/GIMRT, Software for modeling multicomponent-multidimensional reactive transport. User Manual & Programmer's guide, PNNL-11166 (1996).